

ATTENTION!!!

PLEASE READ THIS FIRST!

1). **If you're having this system installed by a professional:** Please ensure installer follows our installation instructions carefully, and verify their work before they leave to ensure everything is working properly and that there are no leaks. If there is any issue, please call us BEFORE they leave so we may help resolve it. We recommend doing installation during our business hours (Mon-Fri 11am-6pm Mountain Standard Time) in case you need to reach us.

2). **Don't forget to remove the shrink wrapping from the filter cartridge/s** (*including cartridges inside the system, if any*) before flushing/using the system.

3). **Add-On Accessories:** If purchased/included: Please ensure they are installed in following order directly after the cold-water valve:

1st - Pressure Regulator

*(*If pressure 80+PSI, must be installed to keep warranty)*

2nd - Leak-Stopper (For Undercounter Systems Only)

(Must be installed to keep warranty)

3rd - Gallon Meter (Optional)

Also, please ensure the area around the Leak-Stopper is dry, else it will activate & shut off the water flow to the system.

4). **The water may be cloudy for apx. 1-2 weeks;** this is a normal effect of the mineral fines being released, and will subside after the 1–2 week adaptation period. The taste of the water should improve further as well. (*Does not apply to whole house or shower filter systems*).

5). Contact us if assistance is needed: 1-347-492-4014



Customer Support:

Tel: 1-347-492-4014

Email: info@PureEffectFilters.com



www.PureEffectFilters.com

Thank you, and Congratulations on your purchase of **The PureEffect™ CLASSIC** Water Filtration System Featuring: AntiRad-Plus™ (“+” Charged Radioisotope removal), SuperBlock™ Anti-Chemical, KDF55® Heavy Metal Filtration and Natural Alkalization Technologies.

INSTALLATION INSTRUCTIONS

Carefully remove and inspect your new filter system for any possible transportation damage. If any damage is found, please notify us promptly.

1. Unscrew the housing chambers with included wrench and remove the cartridges. Position main unit on your counter close enough to the sink to ensure that any excess water coming out of spout can drain.
2. Unscrew your existing faucet aerator head and replace it with the **Diverter Valve** assembly (see component diagram) included with your filter, hand tighten. You may need an adapter (*included*) depending on faucet type. **Plumber’s Tape can help with any leaks.*

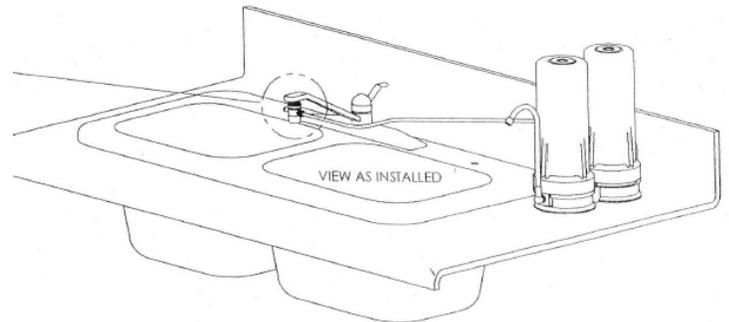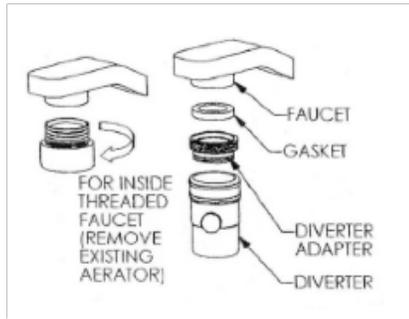

3. Turn unit upside down and find the flow indicators “IN” and “OUT” engraved into the plastic near each port. Screw the Plastic **Water-In Elbow** into the “IN” port & **Spout Elbow** into the “OUT”, insert **Spout** into **Spout Elbow**. (*If you need to position unit on left side of your sink, switch the wall-mount bracket from front to back of unit, then turn unit around*).



4. Next, insert one end of the provided **Tubing** into the “**Water In elbow**” until it “pops-in” as far as it can go, then measure how much tubing you will need to comfortably reach the faucet diverter valve and attach to diverter by: unscrewing the metal ring (*off the diverter output*) and putting the tubing through the ring, then attach the tube and screw ring back on to secure. (*Note: make sure to factor in enough “slack” in tubing for when you move your faucet around.*)

5. **Remove shrink wrap** and insert the **SuperBlock™** Cartridge into **Chamber # 1** and **AntiRad-Plus™** Cartridge into **Chamber #2** with Rubber Ring (Gasket) facing down and close the chambers with provided **wrench**. Do not over tighten, as it will damage o-rings. Proceed with initial cartridge flush instructions below.

IMPORTANT! – PLEASE ENSURE CARTRIDGES ARE INSERTED IN CORRECT ORDER!



INITIAL CARTRIDGE FLUSH AND SYSTEM LEAK TEST

Note: You may want to place something under the unit to collect the water, if there're any leaks or when you unscrew the chamber for step **D.**, or just keep the unit in the sink during this process:

A. Slowly turn on **cold water**, check faucet diverter valve for watertight seal (*O-ring gasket seal should be included in the top of your diverter valve*).

B. With your cold water on, gently pull up the black handle on the **Diverter Valve** to bypass your faucet and redirect the water flow to your filter and out of the **Spout**. **Note: you may hear a slight "hissing" sound when the filter is working, this is normal and is due to the built-in flow-regulator.*

C. Check for any leaks on all tubing and filter connections to ensure watertight connection. *If there are leaks at input or output ports: try to screw the spout elbow and "water-in" elbow a bit tighter, as well as ensure that the white tubing is pushed as far as it can go into the "water-in" elbow.*

D. As the first water begins to flow, you may notice some harmless carbon and Zeolite mineral fines pass through as the cartridge gets flushed. Allow the water to run for **10 minutes** and the flush is complete.

Note: The Water may be cloudy during first few seconds of every use for about a week as the Zeolite in this cartridge adapts and releases harmless mineral fines. This will subside in about a week. (To speed this up, run the system more often throughout the day in short 15-20 second bursts. This is better than leaving it on long, which would waste cartridge life).

E. To Shut off the filter, pull the handle into the down position on diverter valve and turn off the faucet.

THE FILTER SYSTEM IS DESIGNED FOR **COOL - COLD WATER USE ONLY**.

Do not allow hot water to run through the filter system.

FOR CARE & OPTIMAL PERFORMANCE:

1. Let the faucet water run for a few seconds before each operation, as this will extend the filter life by letting the settled particles get flushed out prior to water entering filter.
2. Flush the system for 2 minutes when it hasn't been used for 2 or more days.
3. Never run hot water through the filter as the filtration process will not be effective. Use only cold/cool water. **Throughout usage you may notice the water level fluctuate in the transparent chamber**, this is a normal effect and does not interfere with proper filter function.
4. Never push the diverter valve closed while the water is filter is working, the valve will shut off by itself when water pressure is off.
5. **Filter Cartridge Replacement** (For consistently superior water quality):
 - a. **Every 8 months:** If using 2-3 gallons (32-48 cups)/day
 - b. **Every 12 months:** If using less than 2 gallons (32 cups)/day

We recommend you lubricate the black rubber o-rings inside the housing and on the spout with a FDA & NSF Compliant Food-Grade Silicone lubricant (Available on our website, PureEffectFilters.com in the "Parts" Section) once a year to help maintain leak-free performance

6. **During cartridge changes:** remove cartridges and wipe the unit clean inside using Hydrogen Peroxide (do not get hydrogen peroxide inside the filter cartridges), rinse with warm water, reinsert cartridges and flush with cold water for 5 minutes.
7. **If/when you need to disconnect tubing from input elbow:**

**Push in and hold collet, while pulling tube out.*



8. Do not use system if your water pressure is above 75PSI. A pressure regulator may be obtained on our sites' "Parts" section.

RETURN / EXCHANGE POLICY

1. If the filter arrived damaged, please call us immediately to get an exchange: 1-347-492-4014
2. If you choose to return the filter for any reason other than damage upon arrival, we will be happy to issue a full purchase price refund or exchange within: **14 days of delivery date, minus shipping cost. The return policy applies to water filter systems and any unused (sealed) filter media cartridges.** If cartridges have been opened and used, we will deduct the price of the cartridges from the refund, as they will no longer be re-sellable.
3. **If you decide to return past the 14-day return period, we will still accept the item for up to 30 days from delivery date,** however, there will be a reasonable 10% restocking fee applied. SEP:SEP Please call us or send an email to initiate the return process or if you have any further questions.

Once you've experienced your new system, feel free to share your positive experience by going to our website product page and writing a review. ☺ Thank You! - The PureEffect Team



NO-HASSLE, 2-YEAR WARRANTY

*PureEffectFilters LLC dba PureEffectFilters.com, warrants its water filter systems to be free of defects in parts and workmanship for a period of: **two (2) years** from the date of shipment.*

All our systems are made of high-quality components (not made in china) and are designed to last for many years beyond the warranty period, but if any manufacturing defect is present, it will make itself know well within the warranty period.

*In the rare case that it should become necessary to repair or replace the filtration system or one of it's components, please take a photo of the damaged part and email it along with your order # and a detailed description of the defect to: **info@PureEffectFilters.com** or contact our Customer Service Department at: **1-888-891-4821**. We will handle your claim promptly, and as hassle-free as possible.*

This warranty does not apply to defects resulting from action/s of the user such as: misuse, accidents, improper installation, operation outside of specification (e.g. over the indicated PSI limit, exposure to direct sunlight, freezing temps, UV light), improper maintenance or repair and unauthorized modification.

PureEffectFilters LLC total liability is limited solely to repair or replacement of the product. The warranty set forth above is inclusive and no other warranty, whether written or oral, is expressed or implied.