

Thank you for your purchase!


IMPORTANT! – The “This End Up” marking on the AntiRad-PlusTM cartridge only applies to undercounter systems, for countertop systems this end must be facing down.

CAUTION! For undercounter systems: Please ensure you have turned off the water supply at the cold-water line & opened the dedicated faucet (to release pressure) before servicing system. If you have our Leak-Stopper device installed, ensure to protect it from getting wet during this process.

ULTRA & ULTRA-UC CARTRIDGE CHANGE INSTRUCTIONS

1. ☐ Shut off water supply to system & open filter faucet to verify water is off (for undercounter models). Unscrew Housings with the system’s Housing Wrench.
2. ☐ Remove old cartridges & clean/rinse the system/housings. Recommended: Dry & Lubricate O-rings inside housings (*not on cartridges*) w/ pure silicone only (Avail. on our “parts” page).
3. ☐ Remove shrink wrap from new cartridges: Place **SuperBlockTM** in input **Chamber #1** & **FluorSorb-MAXTM** in Middle **Chamber #2**, close **Chamber #3** empty for now.
4. ☐ Flush the first two cartridges for 5 minutes.
5. ☐ Place **AntiRad-PlusTM** in Output **Chamber #3** and run system for 10 more min.
6. ☐ If you have our **Gallon-Meter** Installed: Reset it to **500 Gallons** (see its manual).

Check for leaks. Water may be cloudy for apx. 1-2 weeks as the natural minerals adapt, this is a harmless & temporary effect. To speed this up, run the system more often throughout the day in 15-20 second bursts (this is better than leaving it on long, which wastes cartridge life). **If you are storing the set for later, please ensure there are no punctures or holes in the shrink-wrapping or place in Ziplock bags.***

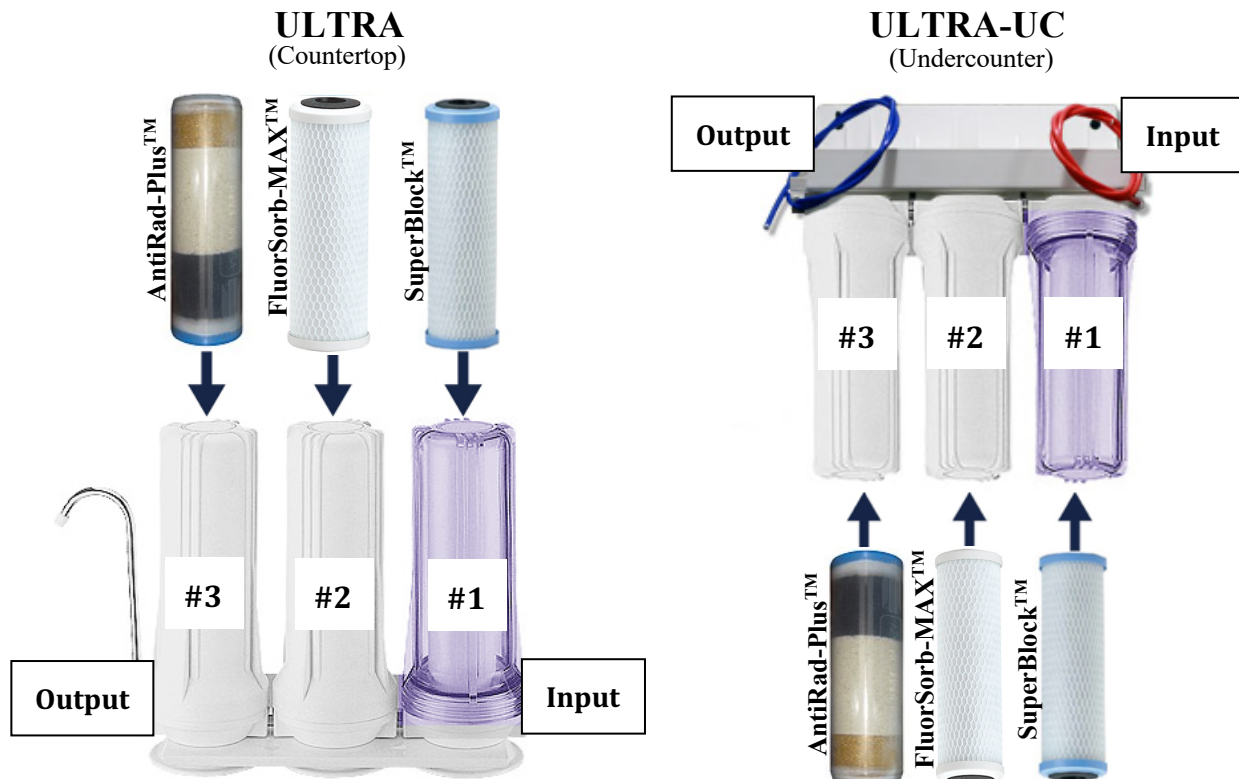

For Reference, Undercounter Install Diagram on Back →

UNDERCOUNTER SYSTEM INSTALLATION DIAGRAM

(For reference & verification)

